


Product Instructions

SPTX-FLA (V2.0)

Flood Alert

- Detects accidental flooding, a compact unit which sits on the floor and is attached to the wall beside the bath
- On the base of the box are two metal studs which detect water on the floor
- The warning is provided by a local sounder
- The internal radio transmitter sends an alarm signal to a GEO84Z or GEO84ZWM pager
- Range approx. 30 metres
- Battery powered

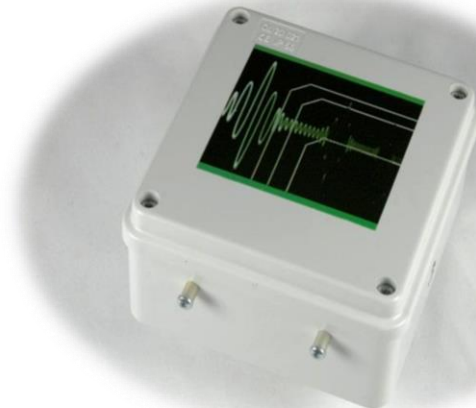

Instructions for Use

- Screw the bracket to the wall adjacent to the bath (if tiled, use the Velcro pads) slip on the box, ensuring the two silver studs on the base of the box are touching the floor.
- Test the unit by placing a wet sponge on the floor so that it touches both studs. The alarm will be triggered and resets when the sponge is removed and the floor is dry.
- ***The flood alert must be tested by the carer at least once a week.***



IP65 Control box dimension

Length 93mm x width 93mm x Depth 55mm

Power supply

9v PP3 battery